


Micro-D

Latching Micro-D

► Latching Micro-D Male Discrete Leadwire (TYPE WD)

Series	# of Contacts	Shell Material and Finish	Termination Type	Options
		/ Hardware		
■ LMD	009	N (STD)	WD - Discrete	HTE
P-Pin	015	Aluminum Shell, Electroless Nickel Plated	Leadwire	High Temp. Epoxy
	021	C		
	025	Aluminum Shell, Cadmium Plated		
	031	B		
	037	Aluminum Shell, Black Anodized		
	512	P		
(Two Row 051) Options: 001-051		Stainless Steel Shell, Passivated		
		50- Latch		
				

Example

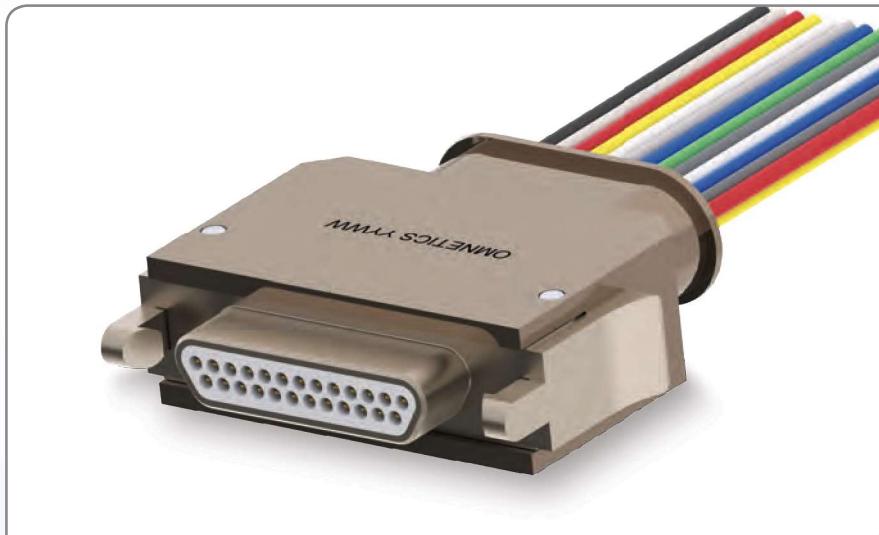

LMDP-025-N50-WD6Q18.0-1-HTE-BS

10

Micro-D


Latching Micro-D

► Latching Micro-D Female Discrete Leadwire (TYPE WD)

Shell Material and Finish

Series	# of Contacts	/ Hardware	Termination Type	Options	
■ LMD S-Socket	009	N (STD)	WD - Discrete Leadwire	HTE High Temp. Epoxy	
	015	Aluminum Shell, Electroless Nickel Plated			
	021	C			
	025	Aluminum Shell, Cadmium Plated			
	031	B			
	037	Aluminum Shell, Black Anodized			
	512 (Two Row 051)	P			
	Options: 001-051	Stainless Steel Shell, Passivated			
		51 - Latch Receptacle	WIRE AWG: 6 - 26 AWG (STD) 8 - 28 AWG 0 - 30 AWG WIRE TYPE: Q - NEMA HP3 (FORMERLY M16878/4 &/6) (STD) R - M22759/11 S - M22759/33	WIRE LENGTH: 18.0 - 18.00" (STD) XX.X - CUSTOM LENGTH COLOR SCHEME: 1 - 10 REPEATING (STD) 2 - BLUE 3 - WHITE 5 - YELLOW	
					

Example

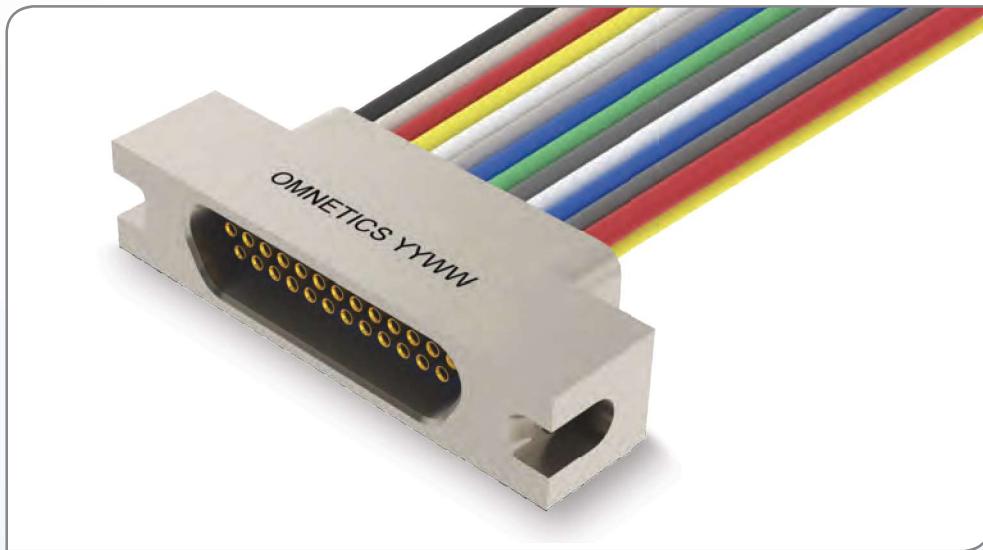

LMDS-025-N51-WD6Q18.0-1-HT