


Micro-D

Latching Micro-D

■ Latching Micro-D Flex Tail (TYPE FF)


Series	# of Contacts	Shell Material and Finish / Hardware		Termination Type	Options	
■ LMD S-Socket 	009		N (STD)		HTE High Temp. Epoxy	
	015		Aluminum Shell, Electroless Nickel Plated			
	021		C		RH RoHS COMPLIANT	
	025		Aluminum Shell, Cadmium Plated			
	031					
	037	Aluminum Shell, Black Anodized				
	512	(Two Row 051)			P	
Options: 001-051	Stainless Steel Shell, Passivated					

Example



LMDS-025-N51-FF-RH

51- Latch Receptacle

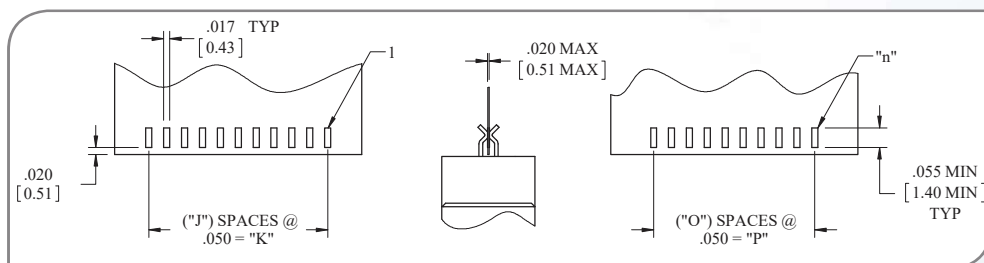

■ Contacts

■ English (IN)

■ Metric (mm)

"n"	Rows	"J"	"K"	"O"	"P"	"J"	"K"	"O"	"P"
9	2	4	.200	3	.150	4	5.08	3	3.81
15	2	7	.350	6	.300	7	8.89	6	7.62
21	2	10	.500	9	.450	10	12.70	9	11.43
25	2	12	.600	11	.550	12	15.24	11	13.97
31	2	15	.750	14	.700	15	19.05	14	17.78
37	2	18	.900	17	.850	18	22.86	17	21.59
51	2	25	1.250	24	1.200	25	31.75	24	30.48