

Micro-D

Latching Micro-D

■ Latching Micro-D Right Angle Thru-Hole (TYPE R2)

Series	# of Contacts	Shell Material and Finish / Hardware	Termination Type	Options
■ LMD S-Socket 	009	 N (STD) Aluminum Shell, Electroless Nickel Plated		HTE High Temp. Epoxy
	015			
	021			
	025	 C Aluminum Shell, Cadmium Plated		RH RoHS COMPLIANT
	031			
	037			
	512 (Two Row 051) Options: 001-051	 B Aluminum Shell, Black Anodized		 P Stainless Steel Shell, Passivated
				

Example



51- Latch Receptacle



PB
Panel Mount, Rear




Example



LMDS-025-N51-R2-HT-RH

51- Latch Receptacle

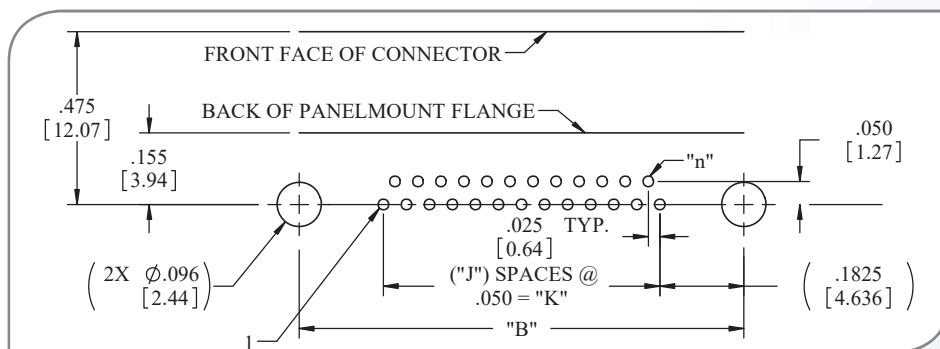

■ Contacts

■ English (IN)

■ Metric (mm)

"n"	Rows	"B"	"J"	"K"	"B"	"J"	"K"
9	2	.565	4	.200	14.35	4	5.08
15	2	.715	7	.350	18.16	7	8.89
21	2	.865	10	.500	21.97	10	12.70
25	2	.965	12	.600	24.51	12	15.24
31	2	1.115	15	.750	28.32	15	19.05
37	2	1.265	18	.900	32.13	18	22.86
51	2	1.615	25	1.250	41.02	25	31.75