



Micro-D

Latching Micro-D

■ Latching Micro-D Straight Thru-Hole (TYPE S2)


Series	# of Contacts	Shell Material and Finish / Hardware	Termination Type	Options
■ LMD S-Socket	009 015 021 025 031 037 512 (Two Row 051) Options: 001-051	 N (STD) Aluminum Shell, Electroless Nickel Plated  C Aluminum Shell, Cadmium Plated  B Aluminum Shell, Black Anodized  P Stainless Steel Shell, Passivated	S2 - Straight Thru-Hole 	HTE High Temp. Epoxy  RH RoHS COMPLIANT  PA Panel Mount, Rear, O-Ring  PB Panel Mount, Rear 

Example

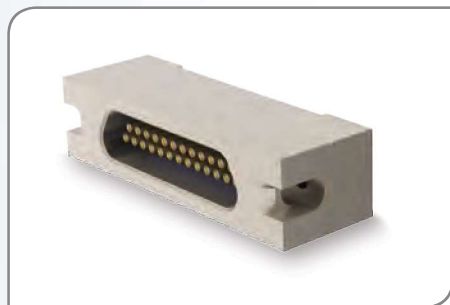

LMDS-025-N51-S2

51- Latch Receptacle

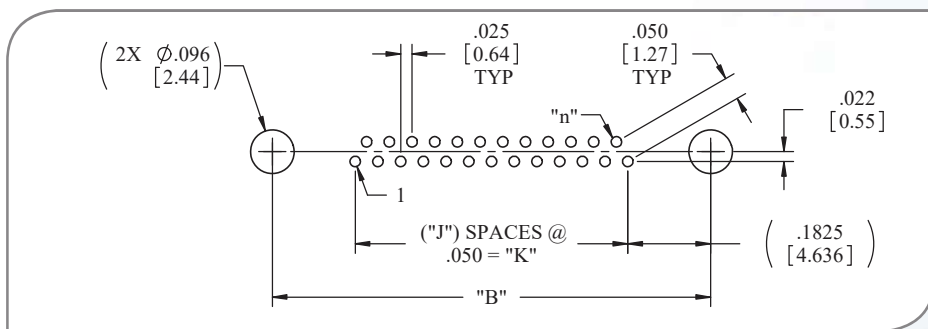

■ Contacts

■ English (IN)

■ Metric (mm)

"n"	Rows	"B"	"J"	"K"	"B"	"J"	"K"
9	2	.565	4	.200	14.35	4	5.08
15	2	.715	7	.350	18.16	7	8.89
21	2	.865	10	.500	21.97	10	12.70
25	2	.965	12	.600	24.51	12	15.24
31	2	1.115	15	.750	28.32	15	19.05
37	2	1.265	18	.900	32.13	18	22.86
51	2	1.615	25	1.250	41.02	25	31.75