


Micro-D

Standard Micro-D


■ Metal Shell Micro-D Card Edge Surface Mount (TYPE C0)

Series	# of Contacts	Shell Material and Finish	Hardware	Termination Type	Options
■ MMD	009	 N (STD)	00 - NONE, Ø	C0	HTE
Male	015	Aluminum Shell,	.092 HOLE (STD)	Card Edge	High Temp.
(P - Pin)	021	Electroless Nickel	01 - FIXED JACK-	Surface Mount	Epoxy
	025	Plated	POSTS (STD)		
	031	 C	02 - JACKSCREWS,		
	037	Aluminum Shell,	STD LENGTH, HEX		
	051*	Cadmium Plated	HEAD (STD)		
		 B	03 - JACKSCREWS,		RH
Female	(Two row 512)	Aluminum Shell,	STD LENGTH,		RoHS
(S-Socket)		Black Anodized	SLOTTED		COMPLIANT
	Options:	 P	04 - JACKSCREWS,		
	001-051	Stainless Steel Shell,	LONG, HEX		
		Passivated	05 - JAC SCREWS		
			LONG, SLOTTED		

Example



MMDP-025-N00-C0-RH

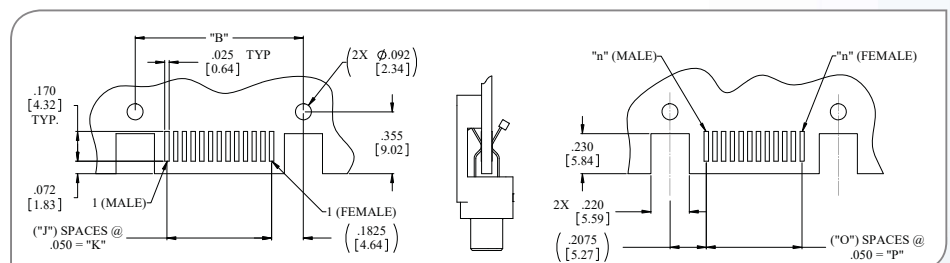

■ Contacts

■ English (IN)

■ Metric (mm)

"n"	Rows	"B"	"J"	"K"	"O"	"P"	"B"	"J"	"K"	"O"	"P"
9	2	.565	4	.200	3	.150	14.35	4	5.08	3	3.81
15	2	.715	7	.350	6	.300	18.16	7	8.89	6	7.62
21	2	.865	10	.500	9	.450	21.97	10	12.70	9	11.43
25	2	.965	12	.600	11	.550	24.51	12	15.24	11	13.97
31	2	1.115	15	.750	14	.700	28.32	15	19.05	14	17.78
37	2	1.265	18	.900	17	.850	32.13	18	22.86	17	21.59
51	2	1.615	25	1.250	24	1.200	41.02	25	31.75	24	30.48