


# Micro-D

## Standard Micro-D


### ■ Metal Shell Micro-D Flex Tail (TYPE FF)

| Series                            | # of Contacts                                                                                  | Shell Material and Finish                                                                                                                                                                                                                                                                                                                                                                                        | Hardware                                                                                                                                                                                                                                                                                                                                                                | Termination Type                                                                                              | Options                                                                                                                                                                                                                                               |
|-----------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ■ <b>MMD</b><br>Male<br>(P - Pin) | <b>009</b><br><b>015</b><br><b>021</b><br><b>025</b><br><b>031</b><br><b>037</b><br><b>512</b> |  <b>N (STD)</b><br>Aluminum Shell,<br>Electroless Nickel<br>Plated                                                                                                                                                                                                                                                              | <b>00</b> - NONE, Ø<br>.092 HOLE (STD)<br><b>01</b> - FIXED<br>JACKPOSTS (STD)<br><b>02</b> - JACKSCREWS,<br>STD LENGTH,<br>HEX (STD)<br><b>03</b> - JACKSCREWS,<br>STD LENGTH,<br>SLOTTED<br><b>04</b> - JACKSCREWS,<br>LONG, HEX<br><b>05</b> - JACKSCREWS,<br>LONG, SLOTTED<br><b>06</b> - FLOAT MOUNT,<br>FRONT MOUNTED<br><b>07</b> - FLOAT MOUNT,<br>REAR MOUNTED | <b>FF</b><br>Flex Tail<br> | <b>HTE</b><br>High Temp.<br>Epoxy<br><br><br><b>RH</b><br>RoHS<br>COMPLIANT<br> |
| Female<br>(S-Socket)              | (Two row 051)<br><br>Options:<br>001-051                                                       |  <b>C</b><br>Aluminum Shell,<br>Cadmium Plated<br><br> <b>B</b><br>Aluminum Shell,<br>Black Anodized<br><br> <b>P</b><br>Stainless Steel<br>Shell, Passivated |                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                               |                                                                                                                                                                                                                                                       |

#### Example



MMDS-025-N00-FF-HTE

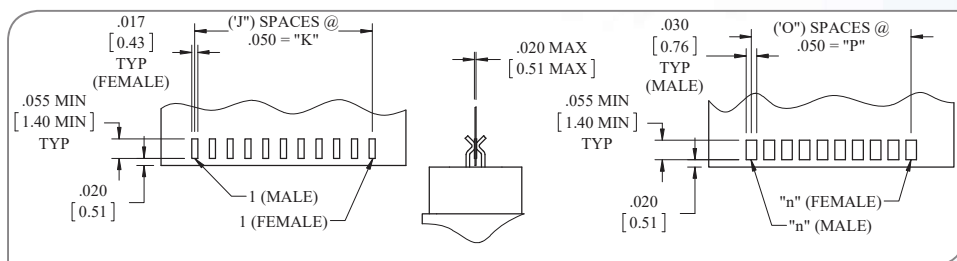

#### ■ Contacts

#### ■ English (IN)

#### ■ Metric (mm)

| "n" | Rows | "J" | "K"   | "O" | "P"   | "J" | "K"   | "O" | "P"   |
|-----|------|-----|-------|-----|-------|-----|-------|-----|-------|
| 9   | 2    | 4   | .200  | 3   | .150  | 4   | 5.08  | 3   | 3.81  |
| 15  | 2    | 7   | .350  | 6   | .300  | 7   | 8.89  | 6   | 7.62  |
| 21  | 2    | 10  | .500  | 9   | .450  | 10  | 12.70 | 9   | 11.43 |
| 25  | 2    | 12  | .600  | 11  | .550  | 12  | 15.24 | 11  | 13.97 |
| 31  | 2    | 15  | .750  | 14  | .700  | 15  | 19.05 | 14  | 17.78 |
| 37  | 2    | 18  | .900  | 17  | .850  | 18  | 22.86 | 17  | 21.59 |
| 51  | 2    | 25  | 1.250 | 24  | 1.200 | 25  | 31.75 | 24  | 30.48 |