

Micro-D

Standard Micro-D


■ Metal Shell Micro-D Horizontal Surface Mount (TYPE H0)

Series	# of Contacts	Shell Material and Finish	Hardware	Termination Type	Options
■ MMD Male (P - Pin)	009 015 021 025 031 037 051*	 N (STD) Aluminum Shell, Electroless Nickel Plated	00 - NONE, Ø .092 HOLE (STD) 01 - FIXED JACK- POSTS (STD) 02 - JACKSCREWS, STD LENGTH, HEX HEAD (STD) 03 - JACKSCREWS, STD LENGTH, SLOTTED 04 - JACKSCREWS, LONG, HEX 05 - JACKSCREWS LONG, SLOTTED	H0 Horizontal Surface Mount 	HTE High Temp. Epoxy  RH RoHS COMPLIANT 
Female (S-Socket)	*(use 512 for two row 051)	 C Aluminum Shell, Cadmium Plated  B Aluminum Shell, Black Anodized  P Stainless Steel Shell, Passivated			

Example



MMDP-025-N00-H0

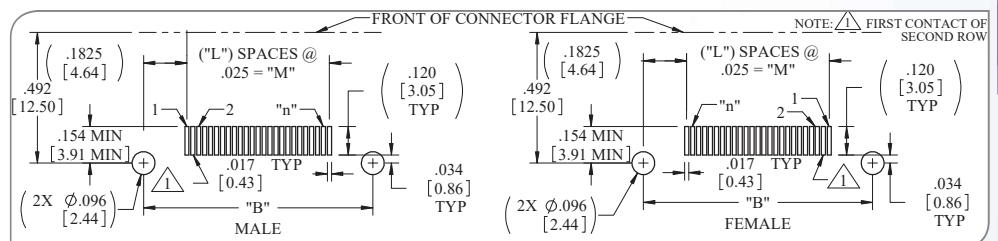

■ Contacts			■ English (IN)			■ Metric (mm)			■ Standard	
"n"	Rows		"B"	"L"	"M"	"B"	"L"	"M"	FEMALE	MALE
9	2		.565	8	.200	14.35	8	5.08	A99601-009	A98601-009
15	2		.715	14	.350	18.16	14	8.89	A99601-015	A98601-015
21	2		.865	20	.500	21.97	20	12.70	A99601-021	A98601-021
25	2		.965	24	.600	24.51	24	15.24	A99601-025	A98601-025
31	2		1.115	30	.750	28.32	30	19.05	A99601-031	A98601-031
37	2		1.265	36	.900	32.13	36	22.86	A99601-037	A98601-037
51	2		1.615	50	1.250	41.02	50	31.75	A99601-512	A98601-512