


Micro-D

Standard Micro-D


■ Metal Shell Micro-D Right Angle Thru-Hole (TYPE R2)

Series	# of Contacts	Shell Material and Finish	Hardware	Termination Type	Options
■ MMD Male (P - Pin)	009 015 021 025 031 037 512	 N (STD) Aluminum Shell, Electroless Nickel Plated	00 - NONE, Ø .092 HOLE (STD) 01 - FIXED JACK- POSTS (STD)	R2 Right Angle Thru-Hole	HTE High Temp. Epoxy
		 C Aluminum Shell, Cadmium Plated	02 - JACKSCREWS, STD LENGTH, HEX HEAD (STD)		
Female (S-Socket)	(Two Row 051)	 B Aluminum Shell, Black Anodized	03 - JACKSCREWS, STD LENGTH, SLOTTED		RH RoHS COMPLIANT
	Options: 001-051	 P Stainless Steel Shell, Passivated	04 - JACKSCREWS, LONG, HEX 05 - JACKSCREWS, LONG, SLOTTED		

Example



MMDP-025-N00-R2

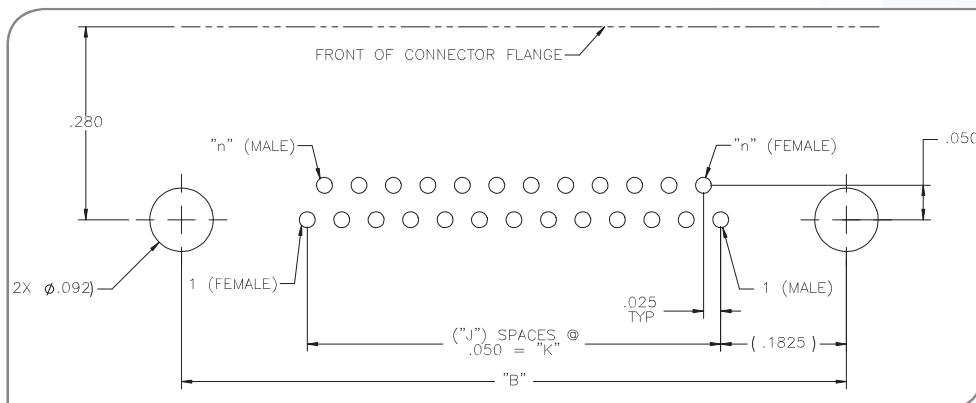

■ Contacts			■ English (IN)			■ Metric (mm)			■ Standard	
"n"	Rows		"B"	"J"	"K"	"B"	"J"	"K"	FEMALE	MALE
9	2		.565	4	.200	14.35	4	5.08	A99421-009	A98421-009
15	2		.715	7	.350	18.16	7	8.89	A99421-015	A98421-015
21	2		.865	10	.500	21.97	10	12.70	A99421-021	A98421-021
25	2		.965	12	.600	24.51	12	15.24	A99421-025	A98421-025
31	2		1.115	15	.750	28.32	15	19.05	A99421-031	A98421-031
37	2		1.265	18	.900	32.13	18	22.86	A99421-037	A98421-037
51	2		1.615	25	1.250	41.02	25	31.75	A99421-512	A98421-512