


Micro-D

Standard Micro-D


■ Metal Shell Micro-D Straight Thru-Hole (TYPE S2)

Series	# of Contacts	Shell Material and Finish	Hardware	Termination Type	Options
■ MMD	009	 N (STD)	00 - NONE, Ø	S2	HTE
Male	015	Aluminum Shell,	.092 HOLE (STD)	Straight	High Temp.
(P - Pin)	021	Electroless Nickel	01 - FIXED JACK-	Thru-Hole	Epoxy
	025	Plated	02 - JACKSCREWS,		
	031	 C	STD LENGTH, HEX		
	037	Aluminum Shell,	HEAD (STD)		
	512	Cadmium Plated	03 - JACKSCREWS,		
		 B	STD LENGTH,		RH
Female	(Two Row 051)	Aluminum Shell,	SLOTTED		RoHS
(S- Socket)		Black Anodized	04 - JACKSCREWS,		COMPLIANT
	Options:	 P	05 - JACKSCREWS,		
	001-051	Stainless Steel	LONG, HEX		
		Shell, Passivated	LONG, SLOTTED		

Example



MMDS-025-N00-S2-HTE

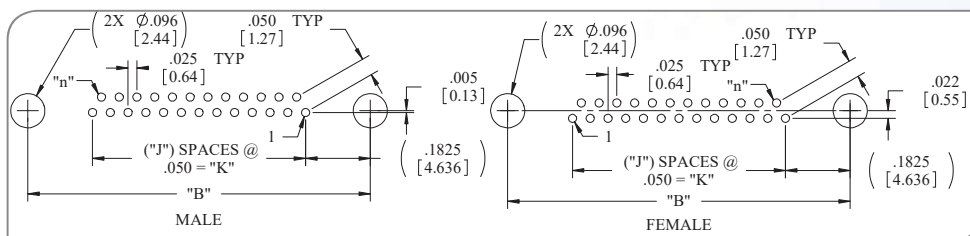

■ Contacts			■ English (IN)			■ Metric (mm)			■ Standard	
"n"	Rows		"B"	"J"	"K"	"B"	"J"	"K"	FEMALE	MALE
9	2		.565	4	.200	14.35	4	5.08	A99521-009	A98521-009
15	2		.715	7	.350	18.16	7	8.89	A99521-015	A98521-015
21	2		.865	10	.500	21.97	10	12.70	A99521-021	A98521-021
25	2		.965	12	.600	24.51	12	15.24	A99521-025	A98521-025
31	2		1.115	15	.750	28.32	15	19.05	A99521-031	A98521-031
37	2		1.265	18	.900	32.13	18	22.86	A99521-037	A98521-037
51	2		1.615	25	1.250	41.02	25	31.75	A99521-512	A98521-512