


Micro-D

Standard Micro-D


■ Metal Shell Micro-D Vertical Surface Mount (TYPE V0)

Series	# of Contacts	Shell Material and Finish	Hardware	Termination Type	Options
MMD Male (P - Pin) 	009	 N (STD) Aluminum Shell, Electroless Nickel Plated	00 - NONE, Ø	V0 Vertical Surface Mount 	HTE High Temp. Epoxy  RH RoHS COMPLIANT 
	015		.092 HOLE (STD)		
	021	 C Aluminum Shell, Cadmium Plated	01 - FIXED JACK- POSTS (STD)		
	025		02 - JACKSCREWS, STD LENGTH, HEX HEAD (STD)		
	031		03 - JACKSCREWS, STD LENGTH, SLOTTED		
Female (S- Socket) 	037	 B Aluminum Shell, Black Anodized	04 - JACKSCREWS, LONG, HEX		
	051*		05 - JAC SCREWS LONG, SLOTTED		
	512	 P Stainless Steel Shell, Passivated			
	(Two row 051)				
	Options: 001-051				

Example



MMDP-025-N00-V0-HT

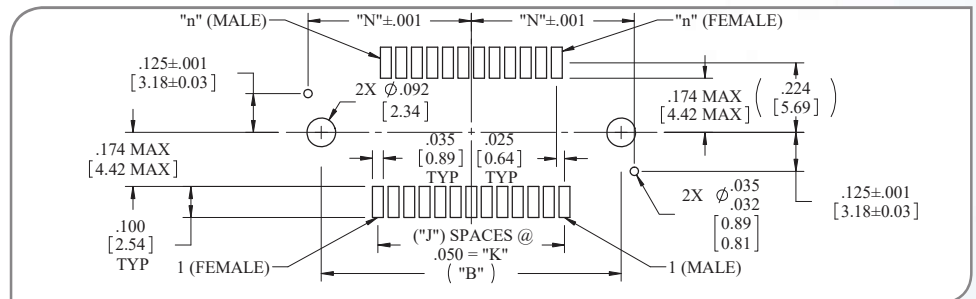

■ Contacts		■ English (IN)				■ Metric (mm)				■ Standard	
"n"	Rows	"B"	"J"	"K"	"N"	"B"	"J"	"K"	"N"	FEMALE	MALE
9	2	.565	4	.200	.325	14.35	4	5.08	8.26	A99701-009	A98701-009
15	2	.715	7	.350	.400	18.16	7	8.89	10.16	A99701-015	A98701-015
21	2	.865	10	.500	.475	21.97	10	12.70	12.07	A99701-021	A98701-021
25	2	.965	12	.600	.525	24.51	12	15.24	13.34	A99701-025	A98701-025
31	2	1.115	15	.750	.600	28.32	15	19.05	15.24	A99701-031	A98701-031
37	2	1.265	18	.900	.675	32.13	18	22.86	17.15	A99701-037	A98701-037
51	2	1.615	25	1.250	.850	41.02	25	31.75	21.59	A99701-512	A98701-512