
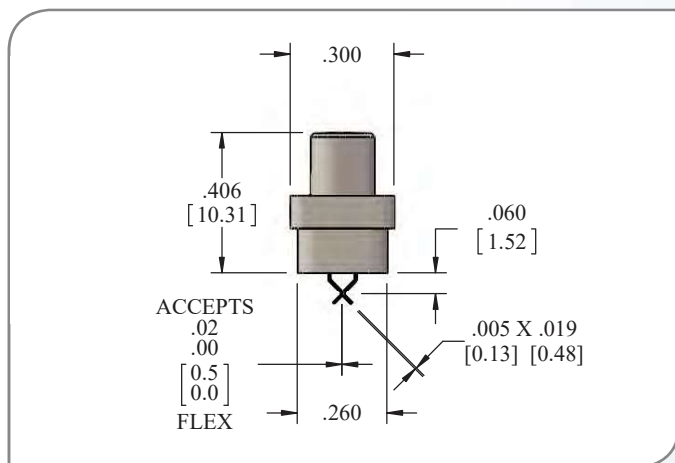
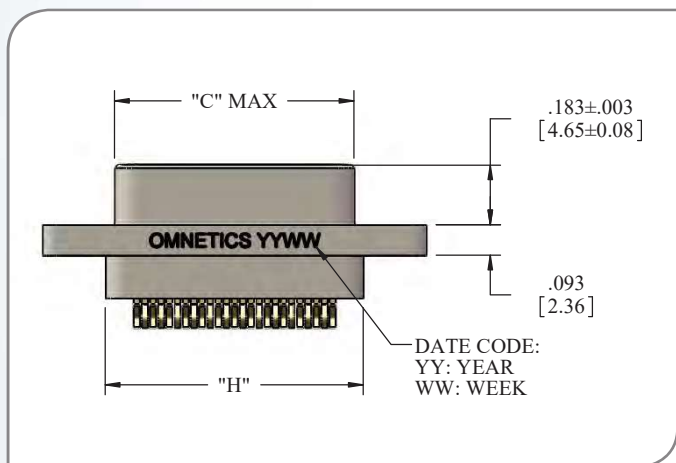


Micro-D

Standard Micro-D

■ Metal Shell Male Micro-D Flex Tail (TYPE FF)

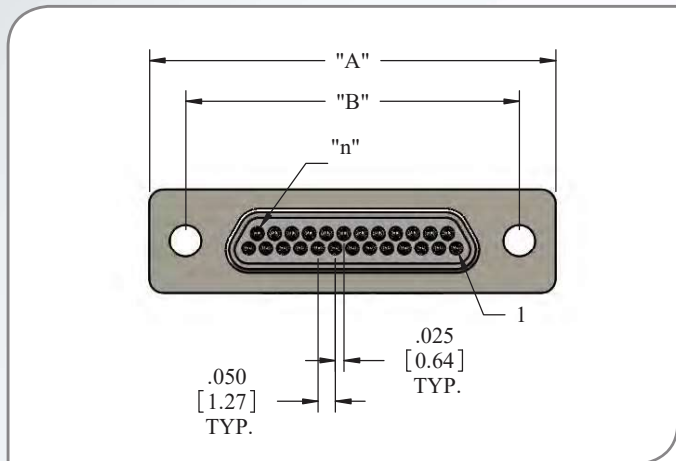

■ Contacts

■ English (IN)




■ Metric (mm)

	"n"	Rows	"A"	"B"	"C"	"H"	"A"	"B"	"C"	"H"
■	9	2	.775	.565	.334	.390	19.69	14.35	8.48	9.91
■	15	2	.925	.715	.484	.540	23.50	18.16	12.29	13.72
■	21	2	1.075	.865	.634	.690	27.31	21.97	16.10	17.53
■	25	2	1.175	.965	.734	.790	29.85	24.51	18.64	20.07
■	31	2	1.325	1.115	.884	.940	33.66	28.32	22.45	23.88
■	37	2	1.475	1.265	1.034	1.090	37.47	32.13	26.26	27.69
■	51	2	1.825	1.615	1.384	1.440	46.36	41.02	35.15	36.58

Micro-D

Standard Micro-D

■ Metal Shell Female Micro-D Flex Tail (TYPE FF)

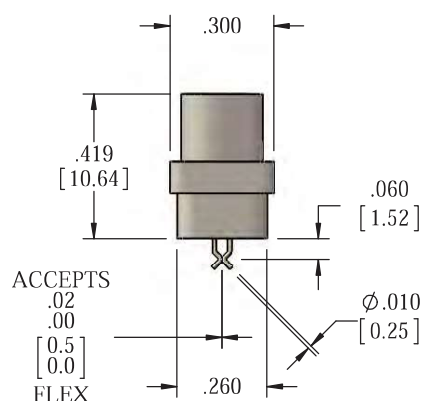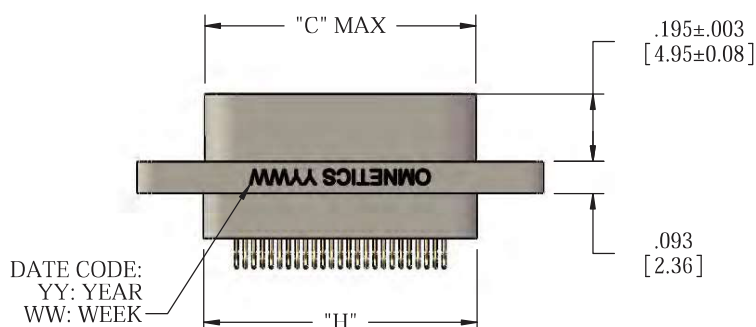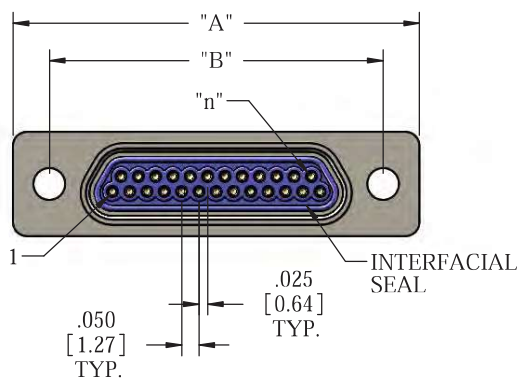

■ Contacts

■ English (IN)

■ Metric (mm)

"n"	Rows	"A"	"B"	"C"	"H"	"A"	"B"	"C"	"H"
9	2	.775	.565	.400	.390	19.69	14.35	8.48	9.91
15	2	.925	.715	.550	.540	23.50	18.16	12.29	13.72
21	2	1.075	.865	.700	.690	27.31	21.97	16.10	17.53
25	2	1.175	.965	.800	.790	29.85	24.51	18.64	20.07
31	2	1.325	1.115	.950	.940	33.66	28.32	22.45	23.88
37	2	1.475	1.265	1.100	1.090	37.47	32.13	26.26	27.69
51	2	1.825	1.615	1.450	1.440	46.36	41.02	35.15	36.58