
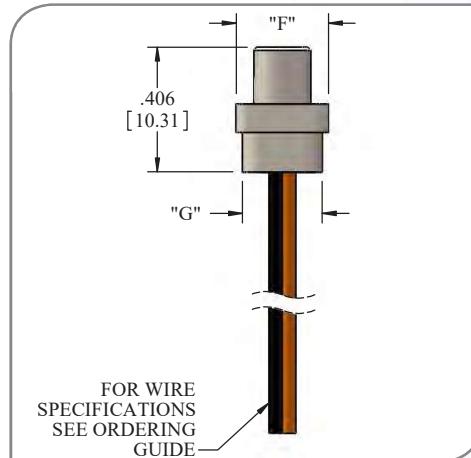
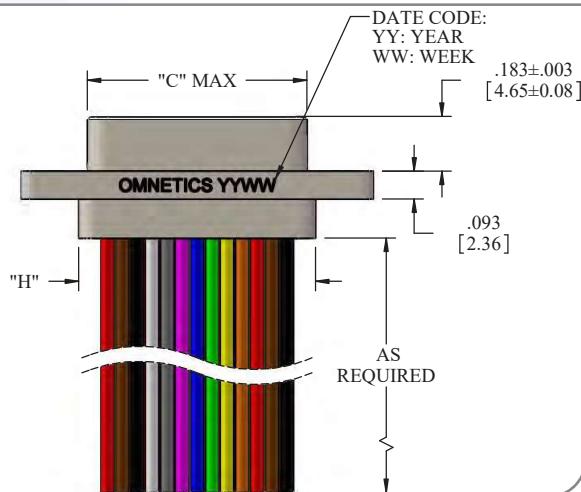


Micro-D

Standard Micro-D

► Metal Shell Micro-D Male Discrete Leadwire (TYPE WD)

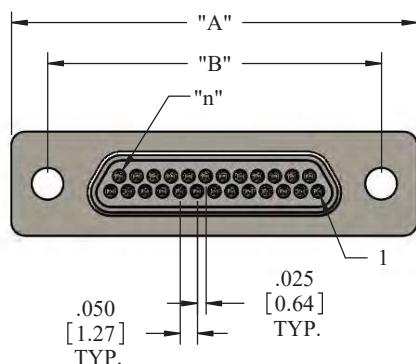

41

► Contacts

► English (IN)




► Metric (mm)

"n"	Rows	"A"	"B"	"C"	"F"	"G"	"H"	"A"	"B"	"C"	"F"	"G"	"H"
9	2	.775	.565	.334	.300	.260	.390	19.69	14.35	8.48	7.62	6.60	9.91
15	2	.925	.715	.484	.300	.260	.540	23.50	18.16	12.29	7.62	6.60	13.72
21	2	1.075	.865	.634	.300	.260	.690	27.31	21.97	16.10	7.62	6.60	17.53
25	2	1.175	.965	.734	.300	.260	.790	29.85	24.51	18.64	7.62	6.60	20.07
31	2	1.325	1.115	.884	.300	.260	.940	33.66	28.32	22.45	7.62	6.60	23.88
37	2	1.475	1.265	1.034	.300	.260	1.090	37.47	32.13	26.26	7.62	6.60	27.69
51	2	1.825	1.615	1.384	.300	.260	1.440	46.36	41.02	35.15	7.62	6.60	36.58
51	3	1.425	1.215	.984	.343	.300	1.040	36.20	30.86	24.99	8.71	7.62	26.42

Micro-D

Standard Micro-D

► Metal Shell Micro-D Female Discrete Leadwire (TYPE WD)

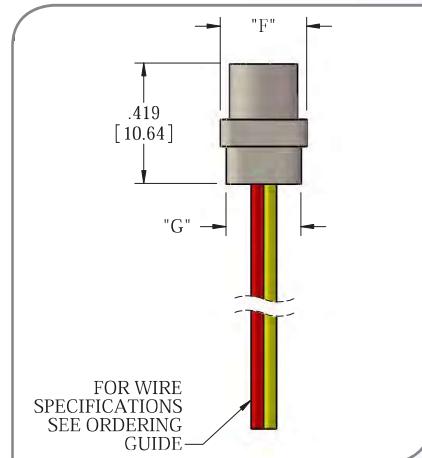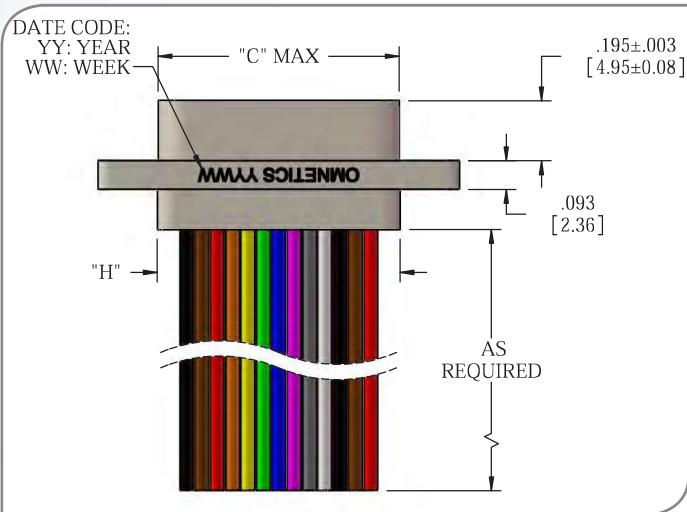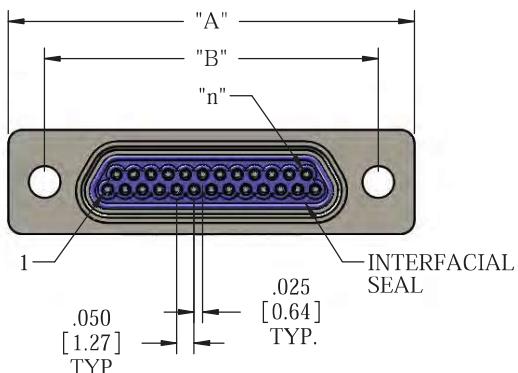

► Contacts

► English (IN)

► Metric (mm)

	"n"	Rows	"A"	"B"	"C"	"F"	"G"	"H"	"A"	"B"	"C"	"F"	"G"	"H"
■	9	2	.775	.565	.334	.300	.260	.390	19.69	14.35	8.48	7.62	6.60	9.91
■	15	2	.925	.715	.484	.300	.260	.540	23.50	18.16	12.29	7.62	6.60	13.72
■	21	2	1.075	.865	.634	.300	.260	.690	27.31	21.97	16.10	7.62	6.60	17.53
■	25	2	1.175	.965	.734	.300	.260	.790	29.85	24.51	18.64	7.62	6.60	20.07
■	31	2	1.325	1.115	.884	.300	.260	.940	33.66	28.32	22.45	7.62	6.60	23.88
■	37	2	1.475	1.265	1.034	.300	.260	1.090	37.47	32.13	26.26	7.62	6.60	27.69
■	51	2	1.825	1.615	1.384	.300	.260	1.440	46.36	41.02	35.15	7.62	6.60	36.58
■	51	3	1.425	1.215	.984	.343	.300	1.040	36.20	30.86	24.99	8.71	7.62	26.42