
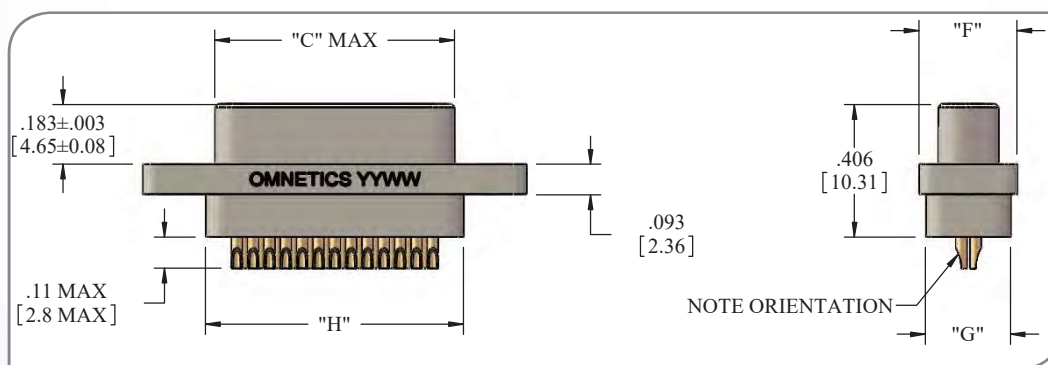
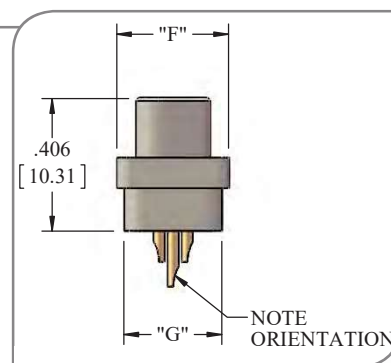
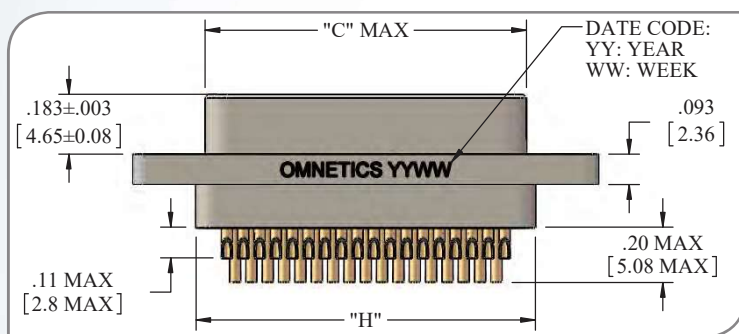


# Micro-D

## Standard Micro-D

### ■ Metal Shell Micro-D Male Solder Cup (TYPE SS)

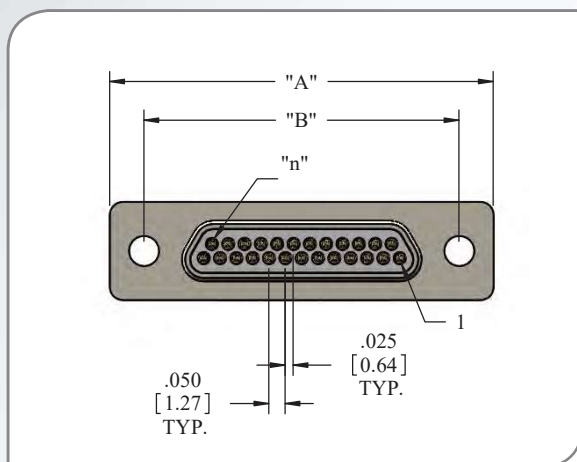

#### ■ Contacts

#### ■ English (IN)





#### ■ Metric (mm)

|   | "n" | Rows | "A"   | "B"   | "C"   | "F"  | "G"  | "H"   | "A"   | "B"   | "C"   | "F"  | "G"  | "H"   |
|---|-----|------|-------|-------|-------|------|------|-------|-------|-------|-------|------|------|-------|
| ■ | 9   | 2    | .775  | .565  | .334  | .300 | .260 | .390  | 19.69 | 14.35 | 8.48  | 7.62 | 6.60 | 9.91  |
| ■ | 15  | 2    | .925  | .715  | .484  | .300 | .260 | .540  | 23.50 | 18.16 | 12.29 | 7.62 | 6.60 | 13.72 |
| ■ | 21  | 2    | 1.075 | .865  | .634  | .300 | .260 | .690  | 27.31 | 21.97 | 16.10 | 7.62 | 6.60 | 17.53 |
| ■ | 25  | 2    | 1.175 | .965  | .734  | .300 | .260 | .790  | 29.85 | 24.51 | 18.64 | 7.62 | 6.60 | 20.07 |
| ■ | 31  | 2    | 1.325 | 1.115 | .884  | .300 | .260 | .940  | 33.66 | 28.32 | 22.45 | 7.62 | 6.60 | 23.88 |
| ■ | 37  | 2    | 1.475 | 1.265 | 1.034 | .300 | .260 | 1.090 | 37.47 | 32.13 | 26.26 | 7.62 | 6.60 | 27.69 |
| ■ | 51  | 2    | 1.825 | 1.615 | 1.384 | .300 | .260 | 1.440 | 46.36 | 41.02 | 35.15 | 7.62 | 6.60 | 36.58 |
| ■ | 51  | 3    | 1.425 | 1.215 | .984  | .343 | .300 | 1.040 | 36.20 | 30.86 | 24.99 | 8.71 | 7.62 | 26.42 |

# Micro-D

## Standard Micro-D

### ■ Metal Shell Micro-D Female Solder Cup (TYPE SS)

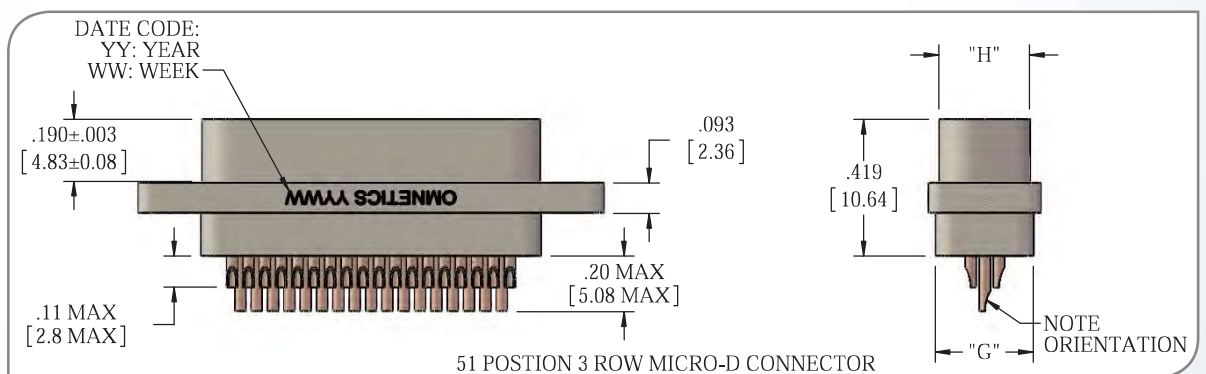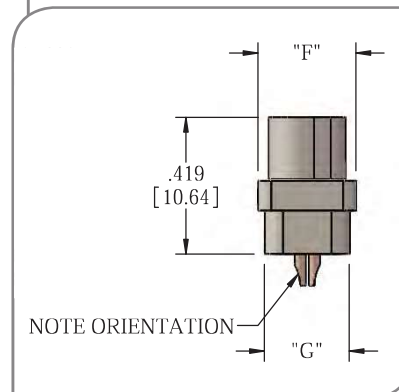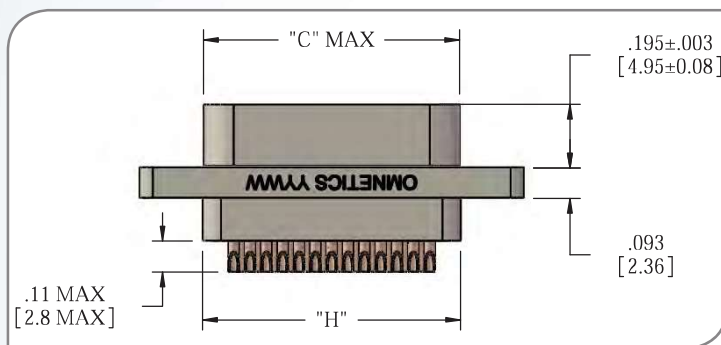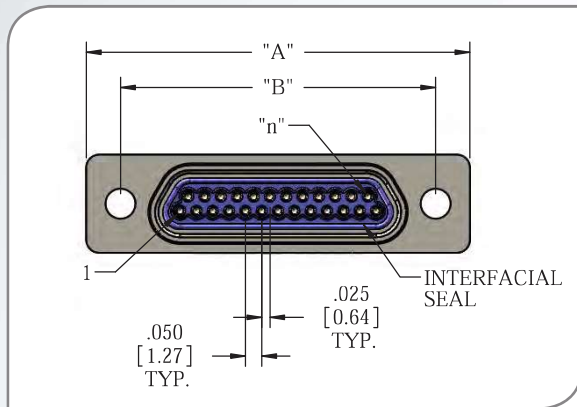

51 POSITION 3 ROW MICRO-D CONNECTOR

#### ■ Contacts

#### ■ English (IN)

#### ■ Metric (mm)

|   | "n" | Rows | "A"   | "B"   | "C"   | "F"  | "G"  | "H"   | "A"   | "B"   | "C"   | "F"  | "G"  | "H"   |
|---|-----|------|-------|-------|-------|------|------|-------|-------|-------|-------|------|------|-------|
| ■ | 9   | 2    | .775  | .565  | .334  | .300 | .260 | .390  | 19.69 | 14.35 | 8.48  | 7.62 | 6.60 | 9.91  |
| ■ | 15  | 2    | .925  | .715  | .484  | .300 | .260 | .540  | 23.50 | 18.16 | 12.29 | 7.62 | 6.60 | 13.72 |
| ■ | 21  | 2    | 1.075 | .865  | .634  | .300 | .260 | .690  | 27.31 | 21.97 | 16.10 | 7.62 | 6.60 | 17.53 |
| ■ | 25  | 2    | 1.175 | .965  | .734  | .300 | .260 | .790  | 29.85 | 24.51 | 18.64 | 7.62 | 6.60 | 20.07 |
| ■ | 31  | 2    | 1.325 | 1.115 | .884  | .300 | .260 | .940  | 33.66 | 28.32 | 22.45 | 7.62 | 6.60 | 23.88 |
| ■ | 37  | 2    | 1.475 | 1.265 | 1.034 | .300 | .260 | 1.090 | 37.47 | 32.13 | 26.26 | 7.62 | 6.60 | 27.69 |
| ■ | 51  | 2    | 1.825 | 1.615 | 1.384 | .300 | .260 | 1.440 | 46.36 | 41.02 | 35.15 | 7.62 | 6.60 | 36.58 |
| ■ | 51  | 3    | 1.425 | 1.215 | .984  | .343 | .300 | 1.040 | 36.20 | 30.86 | 24.99 | 8.71 | 7.62 | 26.42 |