
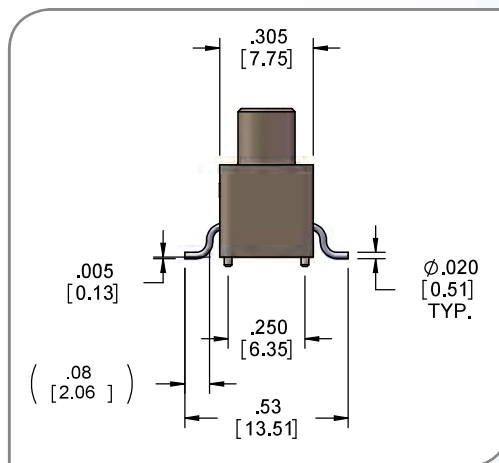
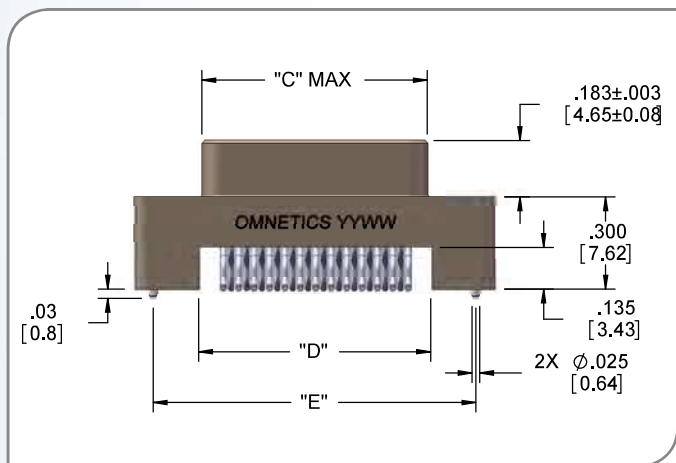
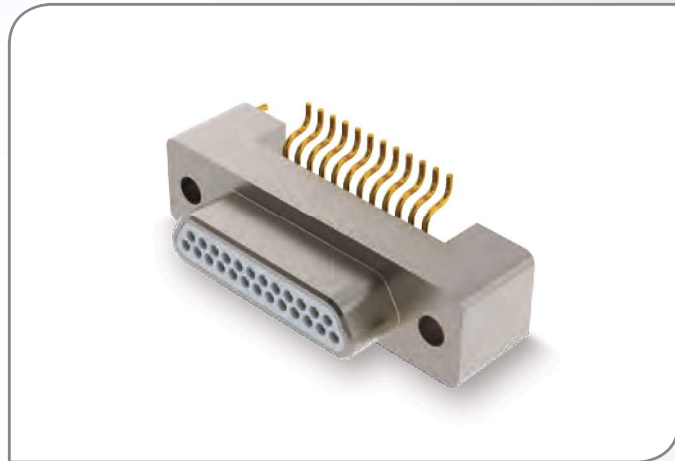


Micro-D

Standard Micro-D

► Metal Shell Micro-D Male Vertical Surface Mount (TYPE V0)

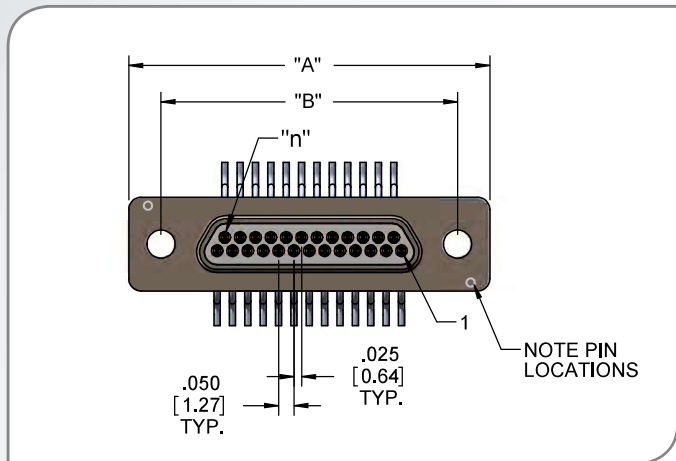

► Contacts

► English (IN)





► Metric (mm)

"n"	Rows	"A"	"B"	"C"	"D"	"E"	"A"	"B"	"C"	"D"	"E"
9	2	.775	.565	.334	.355	.650	19.69	14.35	8.48	9.02	16.51
15	2	.925	.715	.484	.505	.800	23.50	18.16	12.29	12.83	20.32
21	2	1.075	.865	.634	.655	.950	27.31	21.97	16.10	16.64	24.13
25	2	1.175	.965	.734	.755	1.050	29.85	24.51	18.64	19.18	26.67
31	2	1.325	1.115	.884	.905	1.200	33.66	28.32	22.45	22.99	30.48
37	2	1.475	1.265	1.034	1.055	1.350	37.47	32.13	26.26	26.80	34.29
51	2	1.825	1.615	1.384	1.405	1.700	46.36	41.02	35.15	35.69	43.18

Micro-D

Standard Micro-D

■ Metal Shell Micro-D Female Vertical Surface Mount (TYPE VO)

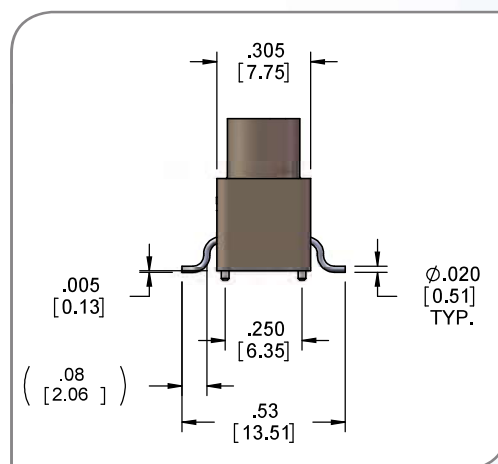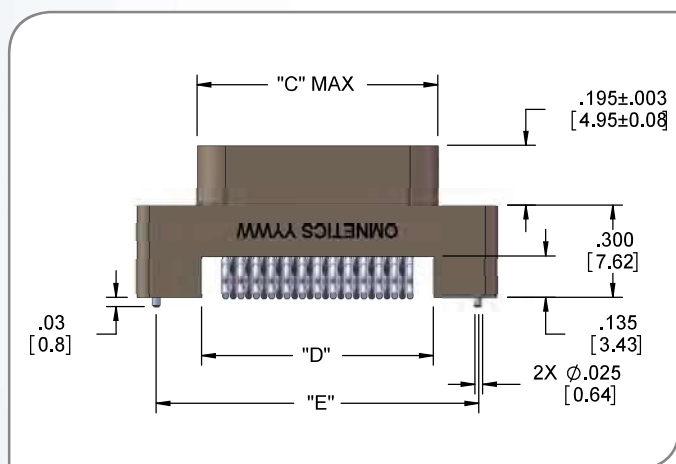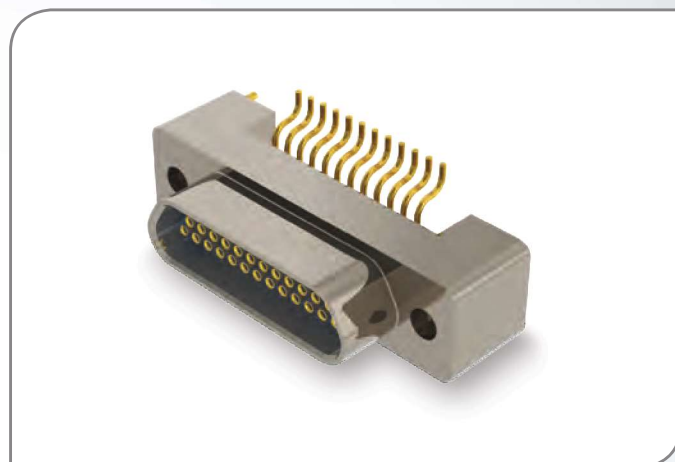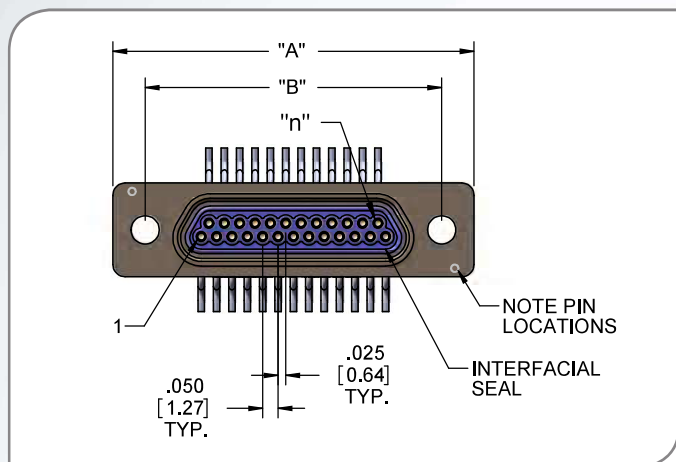

■ Contacts

■ English (IN)

■ Metric (mm)

"n"	Rows	"A"	"B"	"C"	"D"	"E"	"A"	"B"	"C"	"D"	"E"
9	2	.775	.565	.400	.355	.650	19.69	14.35	10.17	9.02	16.51
15	2	.925	.715	.550	.505	.800	23.50	18.16	13.98	12.83	20.32
21	2	1.075	.865	.700	.655	.950	27.31	21.97	17.79	16.64	24.13
25	2	1.175	.965	.800	.755	1.050	29.85	24.51	20.33	19.18	26.67
31	2	1.325	1.115	.950	.905	1.200	33.66	28.32	24.14	22.99	30.48
37	2	1.475	1.265	1.100	1.055	1.350	37.47	32.13	27.95	26.80	34.29
51	2	1.825	1.615	1.450	1.405	1.700	46.36	41.02	36.84	35.69	43.18